

WLS/BOP - Wireless Single Channel Battery Powered Output Module

- 3rd party approval to EN54-18 and EN54-25
- Compatible with all Protec wireless translators and expanders
- 3 year expected battery life
- Self optimising wireless frequency and amplitude algorithms
- Fully intelligent
- Change over relay and 24V output functionality
- On site programmable 12V/24V output




The WLS/BOP Output Module has been designed to allow easy control of a variety of third party equipment including access control doors, ventilation plant and fire extinguishing systems.

The unit is powered entirely from its internal battery supply and is fitted as standard with both a set of change over relay contacts and a 24V dc output. The 24V output is capable of supplying power for operating low current third party equipment directly from the internal batteries.

Technical Specification



Dimensions (mm)

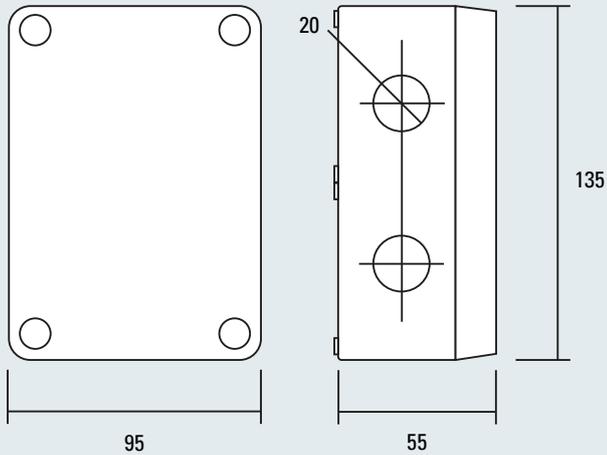


Technical Specification


Operating frequency range	868 - 870 MHz
Max radiated power	5dBm (3mW)
Radio signal modulation type	FSK
Operating frequency channels	7
Communication range with the translator or the expander	≤ 150 m (in open space)
IP Rating	IP65
Max humidity	95% RH (non condensing)
Weight (without batteries)	210 g
Primary battery / Life (typical)	CR123A (3V & 1.2 Ah)/3 yrs
Secondary battery / Life (typical)	CR123A (3V & 1.2 Ah)/2 mnths
Relay Specifications	2A (60W) @ 30V dc
Temperature Range	-10°C to +55°C (no icing)
Maximum Current Available	50mA @ 12V dc, 40mA @ 24V dc
Fault Supervision Resistor	5.6K
Relevant Standard	EN54 Part 18 & 25

Connections and Configuration


Wiring example for the 12VDC/24VDC output.

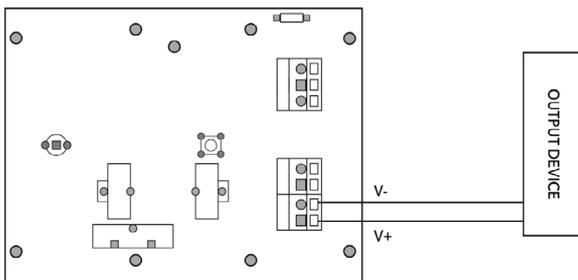

Wiring example with FLT feature.

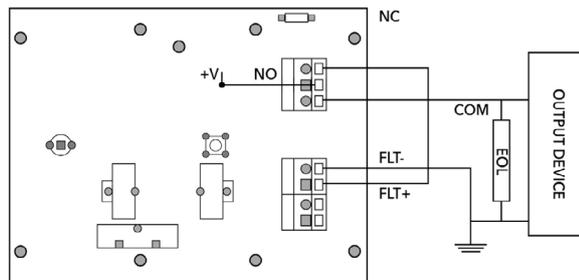

Wiring example for the relay switch output.

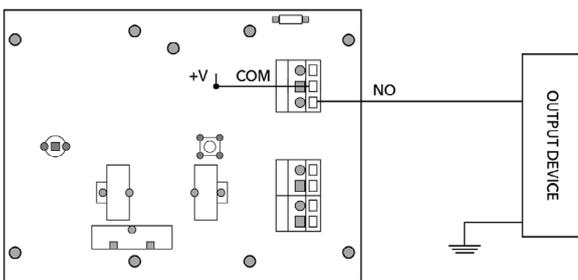

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT

© 2017 - 2021 Protec Fire and Security Group Ltd.

Tel: 01282 717171 Web: www.protec.co.uk Email: sales@protec.co.uk