


ABT-LA10B/PA/ABT-LA20B/PA ABT-LA30B/PA/ABT-LA40B/PA

LINE ARRAY LOUDSPEAKERS COLUMNS

- ✓ *Easy and quick installation*
- ✓ *High sound quality of both speech and music*
- ✓ *Highest level of speech intelligibility*
- ✓ *Ideal for mounting on a ceiling, wall or pole.*
- ✓ *Two cable inputs insulated with glands*
- ✓ *Weatherproof housing IP65*
- ✓ *For indoor and outdoor applications*

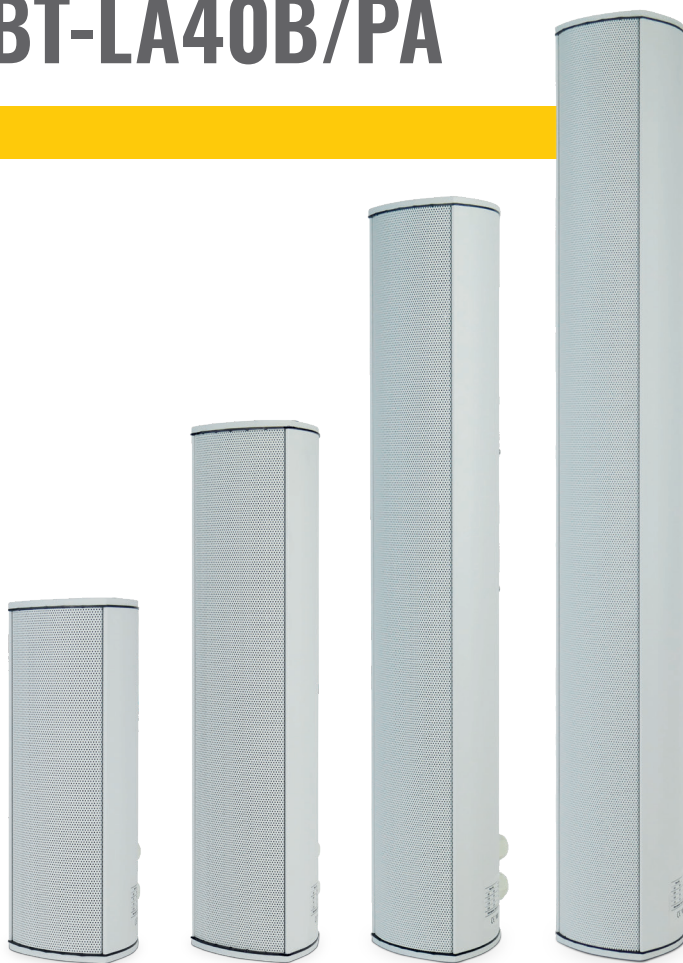

	ABT-LA10B/PA	ABT-LA20B/PA	ABT-LA30B/PA	ABT-LA40B/PA
Electrical				
Rated power, W	10	20	30	40
Tappings 100 V line, W	10 / 5 / 2,5	20 / 10 / 5	30 / 15 / 7,5	40 / 20 / 10
Tappings 70 V line, W	5 / 2,5 / 1,25	10 / 5 / 2,5	15 / 7,5 / 3,75	20 / 10 / 5
Effective frequency range, Hz	150 – 15000*	150 – 15000*	150 – 15000*	150 – 15000*
SPL @ 1 m, 1 W, dB	90	91	93	92
SPL @ 1 m, Rated power, dB	99	104	106	108
Horizontal dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	360 / 190 / 140 / 120	360 / 190 / 140 / 120	360 / 190 / 140 / 120	360 / 180 / 130 / 110
Vertical dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	360 / 96 / 42 / 24	260 / 68 / 34 / 20	104 / 66 / 28 / 14	52 / 28 / 11 / 2
Environmental				
IP rating	IP65			
Min. / max. ambient temperature	-25°C / 55°C			
Mechanical				
Dimensions, mm	95 × 345 × 100	95 × 408 × 100	95 × 519 × 100	95 × 946 × 100
Colour	Light gray (RAL 7035)			
Material	Aluminium			
Impact Protection	IK07			
Mounting	Mounting screws, mounting bracket			

* using the manufacturer's recommended EQ settings

